




Installation instructions Andreani Group RALLY cartridge  
**RACING PRODUCT - RACE USE ONLY**

Unscrew the top cap from the outertube (pic 1).  
Pour out the oil from the fork (pic 2).




pic 1

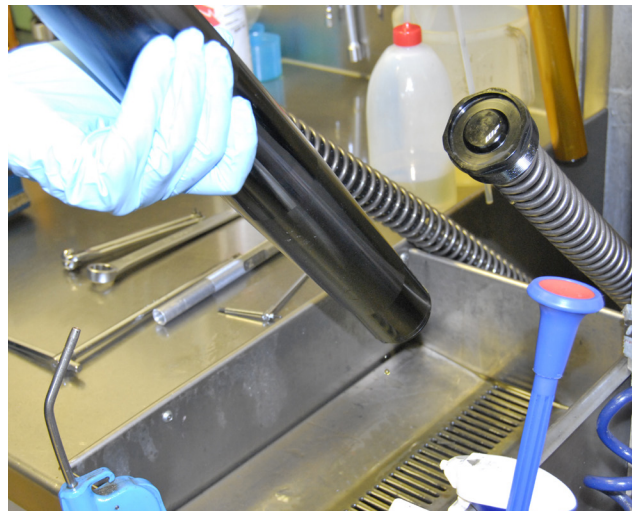

pic 2



pic 3

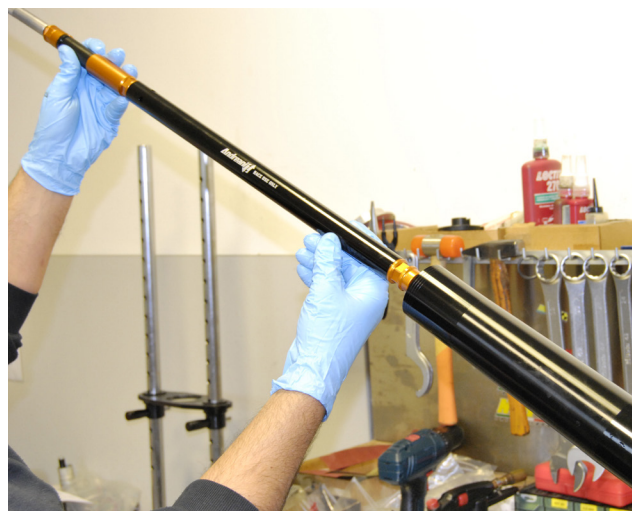

pic 4

Unscrew and Take off the original cartridge (pic 3).  
Insert the Andreani Rally cartridge (pic 4).

# Andreani

Tighten the Andreani Rally cartridge at 20N/mm (pic 5).  
Insert the spring (pic 6).




pic 5



pic 6

pic 7

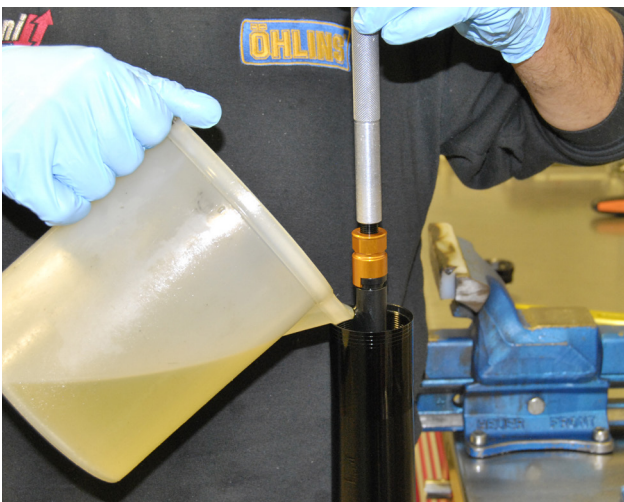


pic 8



Fill the fork with the recommended suspension oil (pic 7).  
Verify the oil level in mm. with the indicated air chamber as per spec sheet (pic 8).

Insert the metal spring spacer with the PVC ring facing the bottom (pic 9).

Block the cartridge with a 19mm allen key on the counter-bolt that holds the cartridge shaft (pic 10).

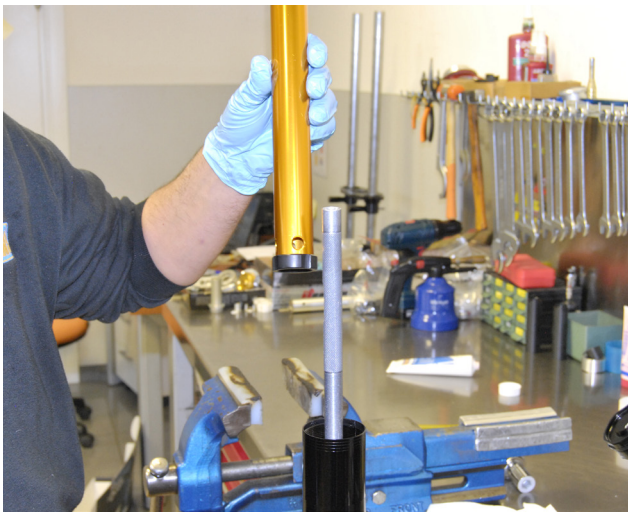

pic 9




pic 10

pic 11



pic 12

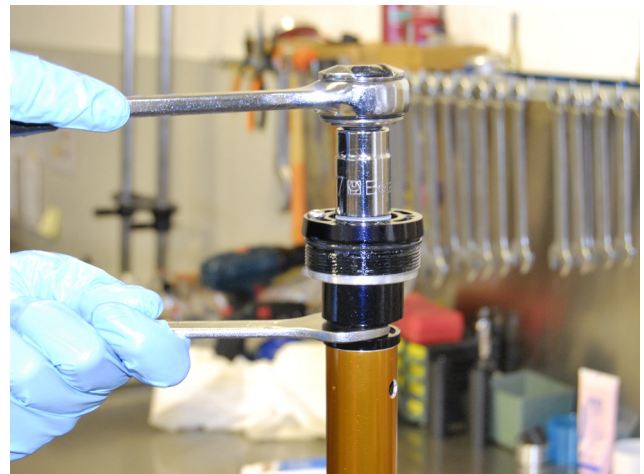


Adjust the cap hydraulic adjuster phase with 4 full turns (pic 11).

Remount the cap on the cartridge shaft tightening it at 20 N/mm (pic 12).

Screw in the cap on the outertube (pic 13).



pic 13

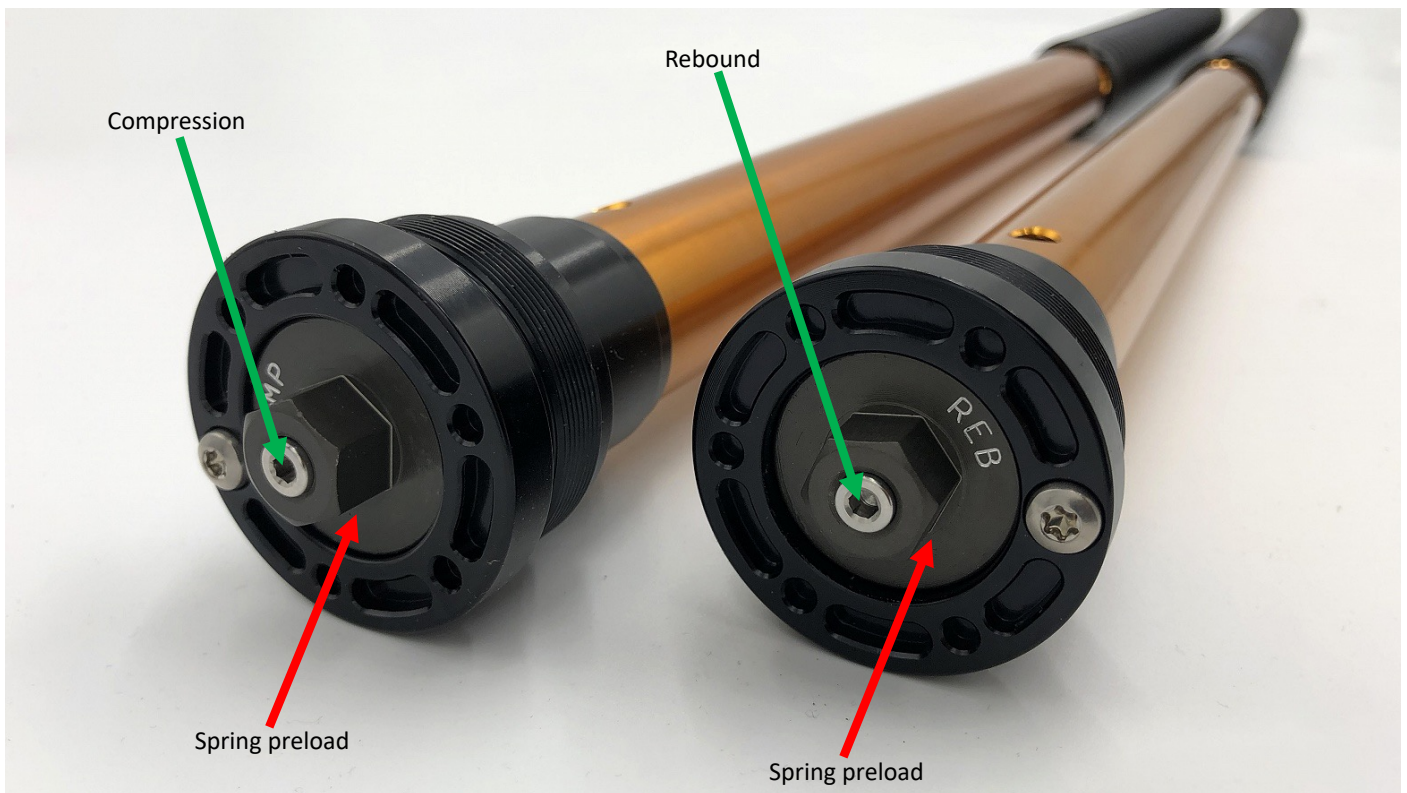

Strada della Romagna 361

61121 Pesaro

Italy

+39 0721 20921

info@andreanigroup.com

www.andreanigroup.com